



FILTRO + LUBRIFICATORE

FILTER + LUBRICATOR



SIMBOLO PNEUMATICO

PNEUMATIC SYMBOL




CODICE ORDINE

ORDER CODE


Mod.	Filetto Thread
AT-F+L M	1/8
AT-F+L M	1/4
AT-F+L M	3/8
AT-F+L M	1/2
AT-F+L M	3/4
AT-F+L M	1"

DIMENSIONI • SIZE


1/8 - 1/4

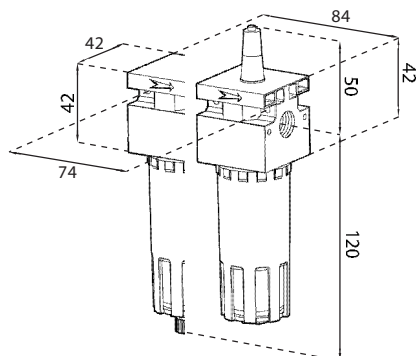

3/8 - 1/2

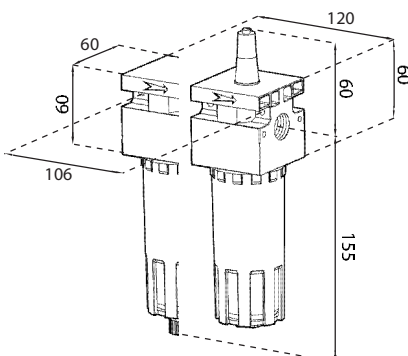

3/4 - 1"

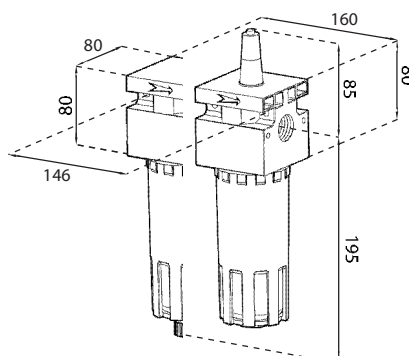

DATI TECNICI • TECHNICAL DATA

	1/8 - 1/4	3/8 - 1/2	3/4 - 1"
Peso • Weight	0,8 Kg	1,6 Kg	3,6 Kg
Viti di fissaggio a parete • Wall fixing screws	M4x40	M4x50	M6x75
Scarico condensa Condensate drain	manuale/semiautomatico • manual/semiautomatic A richiesta scarico condensa automatico (accessori mod. SA) By request automatic drain system (accessories mod. SA)		
Pressione max di ingresso • Maximum inlet pressure	bar 18 - psi 261 - kPa 1800 - MPa 1,8		
Tipo di lubrificazione • Type of lubrication	nebbia d'olio • oil mist		
Pressione max con scarico di condensa automatico Maximum inlet pressure with automatic drain	10 bar		
Portata a 6 bar • Flow rate at 6 bar (87 psi - 600 kPa - 0,6 MPa)	1100 NI/min	3600 NI/min	12000 NI/min
Temperatura max a 10 bar • Maximum temperature at 10 bar (145 psi - 1000 kPa - 1 MPa)	+50° C		
Grado di filtrazione Degree of filtration	20 µm A richiesta grado di filtrazione diverso (4-50 o altro) By request different degree of filtration available (4-50 or others)		
Fluido • Fluid	aria compressa • compressed air		
Posizione di montaggio • Mounting position	verticale • vertical		

Note d'uso: usare oli ISO e UNI FD 22 come il nostro prodotto Cod. AS 22. • Notes: oil recommended are ISO and UNI FD 22 like our article Code AS 22.