



FILTRO + DEPURATORE FILTER + DEPURATOR



SIMBOLO PNEUMATICO PNEUMATIC SYMBOL




CODICE ORDINE ORDER CODE


Mod.	Filetto Thread
AT- F+D M	1/8
AT- F+D M	1/4
AT- F+D M	3/8
AT- F+D M	1/2

DIMENSIONI • SIZE

1/8 - 1/4

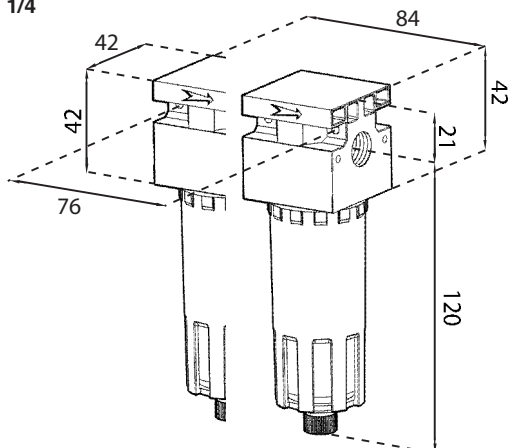

3/8 - 1/2

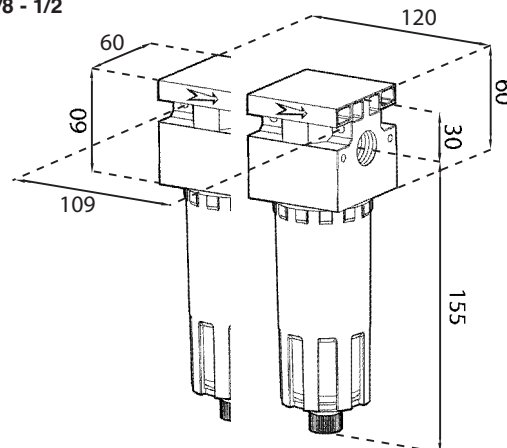

DATI TECNICI • TECHNICAL DATA

	1/8 - 1/4	3/8 - 1/2
Peso • Weight	0,8 Kg	1,8 Kg
Viti di fissaggio a parete • Wall fixing screws	M4x40	M4x50
Scarico condensa Condensate drain	manuale/semiautomatico • manual/semiautomatic A richiesta scarico condensa automatico (accessori mod. SA) By request automatic drain system (accessories mod. SA)	
Pressione max di ingresso • Maximum inlet pressure	bar 18 - psi 261 - kPa 1800 - MPa 1,8	
Pressione max con scarico di condensa automatico Maximum inlet pressure with automatic drain	10 bar	
Temperatura max a 10 bar • Maximum temperature at 10 bar (145 psi - 1000 kPa - 1 MPa)	+50° -25° C	
Grado di filtrazione • Degree of filtration	4 µm	
Grado di depurazione • Degree of depuration	99,97% a 0,01 µm • 99,97% at 0,01 µm	
Fluido • Fluid	aria compressa • compressed air	